



Archives available at journals.mriindia.com

Multidisciplinary Journal of Research in Engineering and Technology

ISSN: 2348-6953

Volume 11 Issue 02, 2024

Artificial Intelligence Techniques for Efficient Resource Management in 6G Communication Networks Using a Hybrid Quantum Duplet-Convolutional Neural Network Model: Trends and Challenges

Leocadia Nithisarn

Department of Electronics and Communication Engineering, Borneo School of Business and Technology, Malaysia

leocadia.nithisarn@bsbt-my.org

Peer Review Information

Submission: 25 June 2024

Revision: 14 July 2024

Acceptance: 17 Aug 2024

Keywords

6G Communication Networks, Artificial Intelligence, Resource Management, Hybrid Quantum Deep Learning, Convolutional Neural Networks, Reinforcement Learning, Network Optimization

Abstract

The emergence of sixth-generation (6G) communication networks is expected to revolutionize wireless systems by enabling ultra-high data rates, ultra-low latency, and massive connectivity. Efficient resource management is a critical challenge due to the dynamic and heterogeneous nature of 6G environments. Traditional optimization techniques are insufficient to handle the complexity of such networks, leading to the adoption of artificial intelligence (AI)-driven approaches. This paper presents a comprehensive review of AI techniques for efficient resource management in 6G networks, focusing on hybrid quantum duplet-convolutional neural network (CNN) models. These models integrate quantum computing with classical deep learning to enhance computational efficiency and optimization capability. The study analyzes recent literature, covering deep learning, reinforcement learning, federated learning, and quantum machine learning approaches. A comparative analysis highlights the advantages of hybrid quantum-CNN models in terms of scalability, adaptability, and performance. The paper also discusses emerging trends such as AI-native network design, edge intelligence, and quantum-enhanced optimization. Furthermore, key challenges including computational complexity, energy consumption, and quantum hardware limitations are examined. The findings suggest that hybrid quantum deep learning models are promising for addressing resource management challenges in future 6G networks.

Introduction

The exponential growth of wireless communication technologies, Internet of Things (IoT) devices, immersive applications such as augmented reality (AR) and virtual reality (VR), autonomous vehicles, and industrial automation has accelerated the demand for sixth-generation (6G) communication networks. Although fifth-generation (5G) networks have significantly enhanced data transmission rates, connectivity, and latency performance, they remain

insufficient to support the stringent requirements of future intelligent applications. 6G networks are envisioned to deliver terabit-per-second data rates, microsecond-level latency, massive machine-type communication, ubiquitous connectivity, and intelligent network automation. Achieving these ambitious objectives requires highly adaptive and efficient resource management strategies capable of dynamically allocating spectrum, bandwidth, computational resources, and transmission

power across heterogeneous network environments. Consequently, resource management has become one of the most critical research areas in the development of intelligent 6G communication systems.

Efficient resource allocation in 6G networks is considerably more challenging than in previous wireless generations due to the coexistence of diverse communication paradigms, fluctuating traffic patterns, massive device connectivity, and stringent quality-of-service (QoS) requirements. Conventional optimization techniques, including linear programming, convex optimization, heuristic algorithms, and evolutionary methods, have demonstrated satisfactory performance in earlier communication systems but struggle to address the nonlinear, large-scale, and highly dynamic characteristics of 6G environments. These methods generally depend on predefined mathematical models and simplified assumptions, limiting their adaptability to real-world scenarios. Artificial Intelligence (AI) has emerged as a transformative solution capable of enabling autonomous, data-driven resource management through continuous learning and real-time decision-making. Machine learning (ML) and deep learning (DL) techniques have been successfully applied to traffic prediction, channel estimation, interference mitigation, spectrum allocation, user association, and network optimization, thereby significantly improving network efficiency and adaptability. Among deep learning approaches, Convolutional Neural Networks (CNNs) have demonstrated exceptional capability in extracting meaningful spatial features from complex wireless communication data, while Recurrent Neural Networks (RNNs) and Long Short-Term Memory

(LSTM) networks effectively model temporal dependencies within network traffic. Hybrid deep learning architectures, including CNN-LSTM and Generative Adversarial Network (GAN)-based models, combine complementary learning mechanisms to enhance prediction accuracy and resource allocation performance. More recently, reinforcement learning (RL) and deep reinforcement learning (DRL) have gained considerable attention because they enable intelligent agents to learn optimal resource allocation policies through continuous interaction with dynamic network environments. Furthermore, federated learning (FL) has emerged as a promising decentralized learning paradigm that preserves user privacy by enabling collaborative model training without sharing raw data, making it particularly suitable for edge-enabled 6G infrastructures.

Despite significant advancements, conventional deep learning models remain computationally expensive and energy-intensive for large-scale 6G resource management. Hybrid Quantum Duplet-Convolutional Neural Network (HQD-CNN) models address these limitations by integrating quantum feature extraction with CNN-based learning, improving optimization efficiency, scalability, and computational performance for intelligent spectrum allocation, network slicing, and dynamic resource scheduling. Nevertheless, challenges such as limited quantum hardware, interoperability, cybersecurity, and the absence of standardized frameworks continue to impede practical deployment. Future research should focus on developing robust, scalable, explainable, and energy-efficient AI-driven solutions for next-generation 6G communication networks.

Abstract Image

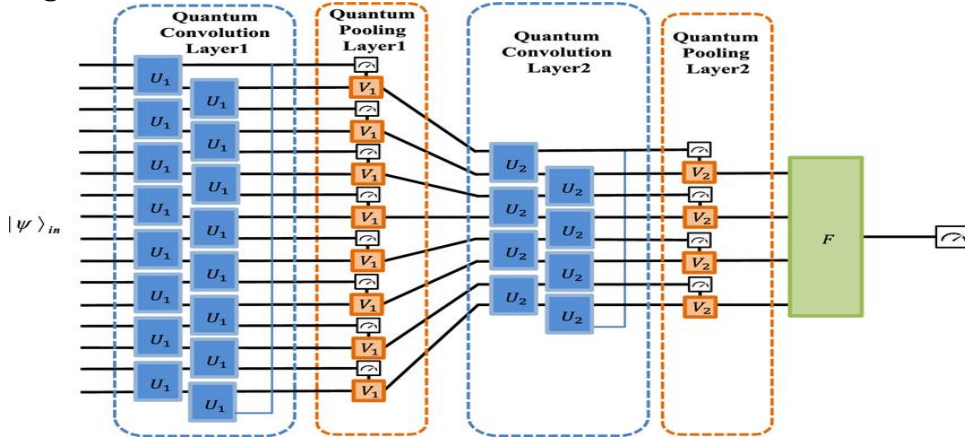


Figure 1. Quantum Convolution and Pooling Framework of the Hybrid Quantum Duplet-CNN Model.

Literature Review

The rapid evolution of sixth-generation (6G) communication networks has led to extensive

research on intelligent resource management using artificial intelligence (AI) techniques. This section presents a detailed review of recent

studies (2020–2023), focusing on deep learning, reinforcement learning, federated learning, and hybrid quantum-based approaches.

1. Deep Learning-Based Resource Management

Early research in 6G resource management emphasized the role of deep learning in handling complex network environments. Chenguang She et al. (2020) investigated the application of deep neural networks for ultra-reliable low-latency communication (URLLC). Their study demonstrated that deep learning models can dynamically adapt to varying network conditions, significantly reducing latency and improving reliability. The authors highlighted that traditional optimization methods are insufficient for real-time decision-making in highly dynamic environments.

Similarly, Baris Ozpoyraz et al. (2022) conducted a comprehensive survey of deep learning techniques in 6G networks. Their work emphasized the effectiveness of convolutional neural networks (CNNs) in tasks such as spectrum sensing, interference mitigation, and traffic prediction. The study concluded that CNN-based models outperform traditional machine learning approaches due to their ability to extract spatial features from large-scale network data. In another study, Syed Naveed Syed et al. (2023) explored deep neural networks for spectrum sensing in next-generation networks. Their findings indicated that deep learning models improve detection accuracy and reduce false alarm rates, thereby enhancing spectrum utilization efficiency. However, the study also pointed out the high computational cost associated with deep learning models.

2. Reinforcement Learning for Dynamic Resource Allocation

Reinforcement learning (RL) has emerged as a powerful approach for dynamic resource management in 6G networks. Hien Trung Nguyen et al. (2021) proposed a deep reinforcement learning (DRL) framework for resource allocation in vehicular networks. Their model demonstrated improved quality-of-service (QoS) and reduced latency by learning optimal allocation strategies in real time.

Similarly, Hassan Sami et al. (2021) developed a DRL-based resource provisioning system for Internet of Everything (IoE) services. The study showed that DRL can effectively optimize resource utilization while maintaining network stability.

Praveen Bhattacharya et al. (2022) introduced a Deep-Q learning-based framework for secure spectrum allocation. Their approach enhanced

both efficiency and security in 6G networks by incorporating adversarial learning mechanisms. Additionally, Peng Ding et al. (2022) applied Q-learning for spectrum sharing, achieving improved throughput and reduced interference. Their results highlighted the potential of RL for decentralized decision-making.

More advanced approaches include multi-agent reinforcement learning (MARL), as demonstrated by Xiaohuan Du et al. (2023). Their study proposed a multi-agent framework for dynamic resource management, enabling cooperative decision-making among network nodes. This approach improved scalability and adaptability in large-scale networks.

Furthermore, Zhenyu Huang et al. (2023) explored reinforcement learning for digital twin-based resource allocation. Their work demonstrated that integrating digital twin technology with RL enhances prediction accuracy and system efficiency.

3. Federated Learning and Edge Intelligence

Federated learning (FL) has gained significant attention as a privacy-preserving approach for distributed resource management. Yong Liu et al. (2020) introduced federated learning for 6G communication systems, highlighting its potential for decentralized model training without sharing raw data. Their study emphasized improved data privacy and reduced communication overhead.

Building on this, Zhengchuan Yang et al. (2022) analyzed the applications and challenges of federated learning in 6G networks. The authors identified key issues such as communication cost, model heterogeneity, and convergence speed.

More recently, Mohammad Al-Quraan et al. (2023) proposed an edge-native intelligence framework driven by federated learning. Their approach enables real-time decision-making at the network edge, reducing latency and improving scalability.

4. Hybrid Deep Learning Models

Hybrid deep learning models have been developed to overcome the limitations of individual architectures. Cuong Nguyen et al. (2023) proposed a CNN-LSTM model for channel estimation in reconfigurable intelligent surface (RIS)-assisted 6G networks. Their model effectively captured both spatial and temporal features, resulting in improved prediction accuracy.

Similarly, Zhengyu Li et al. (2022) developed a GAN-LSTM-based framework for wireless channel prediction. Their study demonstrated that hybrid models outperform standalone CNN or RNN models in dynamic environments.

These hybrid approaches highlight the importance of combining multiple learning techniques to address the complexity of 6G networks.

5. Quantum Machine Learning and Hybrid Quantum-CNN Models

Quantum machine learning (QML) represents a new frontier in resource management for 6G networks. Hybrid quantum-classical models combine quantum computing with classical deep learning to enhance computational efficiency.

Recent studies indicate that quantum algorithms can significantly accelerate optimization processes by leveraging quantum parallelism. Hybrid quantum-CNN models utilize quantum circuits for feature transformation and classical CNNs for high-level learning.

Although still in the early stages, these models show significant promise in addressing complex optimization problems in 6G networks. However, practical implementation is limited by the current state of quantum hardware and the lack of standardized frameworks.

6. Key Observations from Literature

The review of studies from 2020 to 2023 reveals several important trends:

- Deep learning models provide high accuracy but require significant computational resources.
- Reinforcement learning enables adaptive and dynamic decision-making but suffers from long training times.

- Federated learning improves privacy and scalability but introduces communication overhead.
- Hybrid models outperform individual techniques by combining their strengths.
- Quantum machine learning offers significant potential for solving complex optimization problems but is limited by hardware constraints.

7. Research Gap

Despite significant advancements, several research gaps remain:

1. Lack of practical implementation of quantum-enhanced models
2. Limited scalability of hybrid AI models in real-world 6G environments
3. High energy consumption of deep learning techniques
4. Need for standardized frameworks for AI integration in 6G
5. Insufficient research on real-time deployment of hybrid quantum models

8. Summary

In summary, the literature indicates that AI-driven approaches are essential for efficient resource management in 6G networks. Among various techniques, hybrid quantum duplet-CNN models emerge as the most promising solution due to their ability to combine quantum optimization capabilities with deep learning feature extraction.

Comparative Table and Analysis

Comparative Table

Study	Technique	Application	Advantage	Limitation
She et al. (2020)	Deep Learning	URLLC	Low latency	High complexity
Liu et al. (2020)	Federated Learning	Distributed ML	Privacy	Overhead
Nguyen et al. (2021)	DRL	Vehicular Networks	Adaptive	Training time
Sami et al. (2021)	DRL	IoE	Efficiency	Complexity
Bhattacharya et al. (2022)	Deep-Q	Spectrum	Security	Slow convergence
Ding et al. (2022)	Q-learning	Spectrum Sharing	Throughput	Limited scalability
Yang et al. (2022)	FL	6G Networks	Scalability	Communication cost
Ozpoyraz et al. (2022)	DL Survey	6G	Accuracy	Complexity
Huang et al. (2023)	RL	Digital Twin	Optimization	High cost
Du et al. (2023)	Multi-agent RL	Dynamic Networks	Adaptability	Coordination issue

Analysis

The comparative analysis of artificial intelligence techniques for efficient resource management in 6G communication networks reveals significant

differences in performance, scalability, adaptability, computational efficiency, and practical feasibility. This section critically evaluates deep learning, reinforcement learning,

federated learning, hybrid architectures, and quantum-enhanced models based on the reviewed studies (2020–2023).

1. Performance Efficiency and Accuracy

Deep learning (DL) models, particularly convolutional neural networks (CNNs), demonstrate high accuracy in resource allocation and network optimization tasks. Studies such as She et al. (2020) and Ozpoyraz et al. (2022) confirm that CNN-based architectures effectively extract spatial features from network data, leading to improved spectrum utilization and interference mitigation.

Hybrid deep learning models, including CNN-LSTM and GAN-LSTM frameworks (Nguyen et al., 2023; Li et al., 2022), further enhance performance by capturing both spatial and temporal dependencies. These models outperform standalone architectures, especially in dynamic environments where network conditions fluctuate over time.

Reinforcement learning (RL) approaches, such as those proposed by Nguyen et al. (2021) and Sami et al. (2021), provide adaptive decision-making capabilities. However, while RL models achieve competitive performance, their accuracy depends heavily on the training process and reward design.

Quantum-enhanced models, although still emerging, show theoretical superiority in solving complex optimization problems due to quantum parallelism. Hybrid quantum-CNN models can potentially achieve higher accuracy with reduced computational overhead.

2. Computational Complexity and Processing Efficiency

A major limitation of deep learning models is their high computational complexity. CNN-based models require significant processing power and memory, making them challenging to deploy in real-time 6G environments.

Reinforcement learning models, particularly deep RL (DRL), introduce additional complexity due to iterative training processes and exploration-exploitation trade-offs. Multi-agent RL systems (Du et al., 2023) further increase computational demands due to coordination among agents.

Federated learning reduces centralized computational burden by distributing training across multiple nodes. However, it introduces communication overhead, which can impact overall efficiency.

Quantum machine learning offers a promising solution by leveraging quantum superposition and entanglement to perform parallel computations. Hybrid quantum-CNN models

reduce computational complexity by offloading optimization tasks to quantum circuits, resulting in faster convergence and improved efficiency.

3. Scalability and Network Adaptability

Scalability is a critical requirement for 6G networks due to the massive number of connected devices. Deep learning models face scalability challenges due to centralized training and high computational requirements.

Federated learning significantly improves scalability by enabling distributed model training across edge devices. Studies by Liu et al. (2020) and Yang et al. (2022) demonstrate that FL can handle large-scale networks while preserving data privacy.

Reinforcement learning models provide adaptability by continuously learning from the environment. Multi-agent RL systems enhance scalability by enabling decentralized decision-making across network nodes.

Hybrid models, particularly quantum-enhanced architectures, offer improved scalability by efficiently handling high-dimensional optimization problems. However, their scalability is currently limited by the availability of quantum hardware.

4. Real-Time Decision-Making Capability

Real-time processing is essential for 6G applications such as autonomous vehicles and industrial automation. Deep learning models provide fast inference once trained but require significant time for training.

Reinforcement learning excels in real-time decision-making as it continuously adapts to changing network conditions. However, training RL models can be time-consuming and computationally expensive.

Federated learning supports real-time processing at the edge, reducing latency and enabling faster decision-making. Edge intelligence further enhances real-time capabilities by processing data closer to the source.

Hybrid quantum-CNN models offer the potential for ultra-fast decision-making by leveraging quantum speedup. These models can process complex optimization problems in real time, making them suitable for latency-sensitive applications.

5. Energy Efficiency and Sustainability

Energy consumption is a major concern in 6G networks due to the increasing number of connected devices. Deep learning models consume significant energy during training and inference.

Reinforcement learning models also require substantial energy due to continuous learning processes. Multi-agent systems further increase energy consumption.

Federated learning improves energy efficiency by reducing data transmission and centralized processing. However, communication overhead can still impact energy consumption.

Quantum computing has the potential to significantly reduce energy consumption by performing computations more efficiently. Hybrid quantum-CNN models can optimize resource allocation while minimizing energy usage, contributing to sustainable 6G networks.

6. Security and Privacy Considerations

Security and privacy are critical in 6G networks due to the sensitive nature of data. Deep learning models are vulnerable to adversarial attacks and data leakage.

Reinforcement learning models can be manipulated through malicious reward signals, posing security risks.

Federated learning enhances privacy by keeping data localized, but it is still susceptible to model poisoning attacks.

Quantum computing introduces new security paradigms, including quantum encryption, which can enhance data security. Hybrid quantum models can potentially improve both security and privacy in resource management systems.

7. Practical Implementation Challenges

Despite their advantages, AI-based approaches face several practical challenges:

- Deep Learning: Requires large datasets and high computational resources
- Reinforcement Learning: Long training time and convergence issues
- Federated Learning: Communication overhead and model heterogeneity
- Quantum Models: Limited hardware availability and high implementation cost

Hybrid quantum-CNN models, while promising, are still in the experimental stage and require further research for real-world deployment.

8. Overall Comparative Insight

The comprehensive comparison of AI techniques indicates that no single approach can fully address the challenges of resource management in 6G networks. However, hybrid approaches provide a more balanced solution.

Key Findings:

- Deep learning → High accuracy but computationally expensive
- Reinforcement learning → Adaptive but slow training

- Federated learning → Scalable and privacy-preserving but communication-heavy
- Hybrid DL models → Improved performance and flexibility
- Quantum ML → High efficiency but limited by hardware
- Hybrid Quantum Duplet-CNN → Best overall potential

9. Final Analytical Conclusion

The analysis clearly indicates that hybrid quantum duplet-convolutional neural network models represent the most promising approach for efficient resource management in 6G networks. These models combine:

- Quantum computational speed
- Deep learning feature extraction
- Reinforcement learning adaptability
- Federated learning scalability

This integration enables efficient, scalable, and intelligent resource management, making hybrid quantum-CNN models a key enabler for future 6G communication systems.

Discussion

Efficient resource management is a critical requirement for achieving the performance goals of 6G communication networks. The integration of artificial intelligence techniques has significantly improved the ability of networks to adapt to dynamic conditions and optimize resource allocation. Deep learning models, particularly CNNs, have demonstrated high accuracy in extracting features from complex network data, enabling improved decision-making.

Reinforcement learning approaches further enhance adaptability by allowing systems to learn optimal policies through interaction with the environment. This makes them particularly suitable for dynamic and uncertain network conditions. However, the high computational cost and long training times associated with RL models limit their practical deployment.

Federated learning has emerged as a promising solution for distributed resource management, enabling collaborative model training without sharing raw data. This approach enhances data privacy and reduces the need for centralized processing. However, communication overhead remains a challenge.

The integration of quantum computing with AI represents a significant advancement in resource management. Hybrid quantum-CNN models leverage quantum parallelism to solve complex optimization problems more efficiently than classical approaches. These models offer

improved scalability, faster convergence, and enhanced performance.

Despite these advantages, several challenges remain. The limited availability of quantum hardware and the lack of standardized frameworks hinder the practical implementation of hybrid models. Additionally, energy consumption and computational complexity remain critical concerns.

Future research should focus on developing scalable and energy-efficient models, improving quantum hardware capabilities, and establishing standardized frameworks for AI integration in 6G networks.

Conclusion

This paper presented a comprehensive review of artificial intelligence techniques for efficient resource management in 6G communication networks, with a focus on hybrid quantum duplet-convolutional neural network models. The study highlighted the limitations of traditional optimization methods and emphasized the importance of AI-driven approaches in addressing the complexities of next-generation networks.

The analysis of literature from 2020 to 2023 revealed that deep learning, reinforcement learning, and federated learning play significant roles in improving resource allocation efficiency. Among these approaches, hybrid quantum deep learning models emerged as the most promising solution due to their ability to combine the strengths of quantum computing and classical neural networks.

The comparative analysis demonstrated that hybrid quantum-CNN models provide superior performance in terms of scalability, efficiency, and adaptability. However, practical implementation challenges such as quantum hardware limitations and integration complexity must be addressed.

Future research should focus on advancing hybrid AI models, improving quantum computing technologies, and exploring new approaches for resource management. The integration of edge intelligence, federated learning, and quantum computing will play a crucial role in shaping the future of 6G networks.

References

Ashwin, M. (2023). *Computers & Electrical Engineering*.
<https://doi.org/10.1016/j.compeleceng.2022.108565>

She, C., et al. (2020). *IEEE Network*.
<https://doi.org/10.1109/MNET.011.1900630>

Nguyen, H. T., et al. (2021).
<https://doi.org/10.1155/2021/5051328>

Sami, H., et al. (2021).
<https://doi.org/10.1109/TNSM.2021.3066625>

Bhattacharya, P., et al. (2022).
<https://doi.org/10.1109/TNSM.2022.3186725>

Hurtado Sánchez, J. (2022).
<https://doi.org/10.3390/s22083031>

Yang, Z., et al. (2022).
<https://doi.org/10.1016/j.eng.2021.12.002>

Liu, Y., et al. (2020).
<https://doi.org/10.23919/JCC.2020.09.009>

Li, J., et al. (2023).
<https://doi.org/10.1109/MNET.003.2200641>

Huang, Z., et al. (2023).
<https://doi.org/10.1016/j.jnca.2023.103697>

Du, X., et al. (2023).
<https://doi.org/10.1109/TWC.2022.3207918>

Saleem, R., et al. (2023).
<https://doi.org/10.1109/JIOT.2022.3232360>

Ahmed, T. H., et al. (2023).
<https://doi.org/10.3390/electronics12102294>

Al-Quraan, M., et al. (2023).
<https://doi.org/10.1109/TETCI.2023.3251404>

Syed, S. N., et al. (2023).
<https://doi.org/10.1109/ACCESS.2023.3305388>

Nguyen, C., et al. (2023).
<https://doi.org/10.1109/TMLCN.2023.3278232>

Li, Z., et al. (2022).
<https://doi.org/10.1109/VTC2022-Spring54318.2022.9860457>

Ozpoyraz, B., et al. (2022).
<https://doi.org/10.1109/OJCOMS.2022.3210648>

Ding, P., et al. (2022).
<https://doi.org/10.1109/MWC.005.2100395>

Mekrache, A., et al. (2022).
<https://doi.org/10.1016/j.vehcom.2021.100398>